


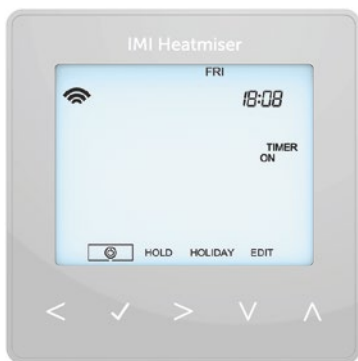


|                                        |     |
|----------------------------------------|-----|
| Temperature Range                      | N/A |
| White Back Lit Screen                  | Y   |
| Non-Programmable Mode                  | N   |
| 5/2 Day Programming Mode               | Y   |
| 7 Day Programming Mode                 | Y   |
| 24 Hour Programming Mode               | Y   |
| Number of Heating Levels               | N/A |
| Optimum Start                          | N   |
| Number of Switching Times (Timer mode) | 4   |
| Holiday Function                       | Y   |
| Keylock Function                       | Y   |
| Temperature Hold Function              | N   |
| Temperature Override Temperature       | N   |
| Override Limit                         | N   |
| Output Delay                           | N   |

|                                   |                           |
|-----------------------------------|---------------------------|
| Frost Protection (7°C - 17°C)     | N                         |
| Mesh Networking Facility          | Y                         |
| °C / °F Option                    | N                         |
| Built In Air Sensor               | N                         |
| Remote Air Sensing Mode           | N                         |
| Floor Sensing Mode                | N                         |
| Remote Probe Included             | N                         |
| Floor Temp Limit Protection       | N                         |
| Approach Sensor                   | Y                         |
| Max Switching Current             | 3A                        |
| Accuracy +/-                      | N/A                       |
| Adjustable Switching Differential | N/A                       |
| <b>Supply</b>                     | <b>230V AC</b>            |
| <b>Installed Dimensions</b>       | <b>85x85x13mm (L,H,D)</b> |
| <b>Weight</b>                     | <b>140g</b>               |



## Feature Table - Timer Mode

|    |              |                                                                           |
|----|--------------|---------------------------------------------------------------------------|
| 01 | Pairing      | Used to pair to the neoHub                                                |
| 02 | Program Mode | 01 = Weekday/Weekend (Default), 02 = 7 Day Programming, 03 = 24 Hour Mode |

## Product Dimensions (mm) & Wiring Specification

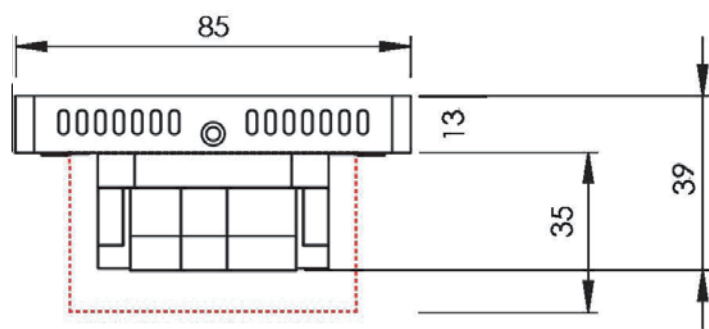

Note: Fits standard 35mm depth back box

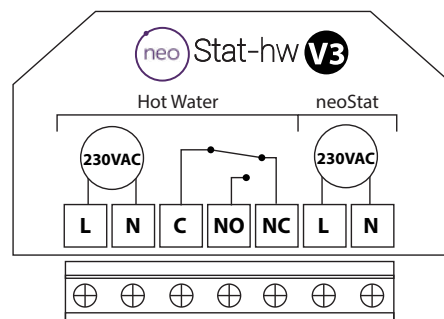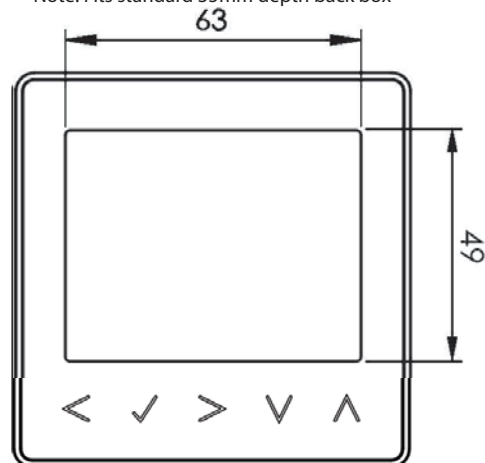

Wiring Detail

